

## FUMIGATION SOLUTIONS

### TREMBLE AUTOMATIC PILL DISPENSER


#### KEY NEW BENEFITS

- Unique tremble action to ensure smooth operation and minimised jamming
- One dosing plate for entire product life
- Speed adjustment with electronic dial

The CTM automatic pill dispenser is the ideal solution for dosed addition of fumigants into the grain stream of silo cells. Commonly used with fumigants such as Phostoxin and Magtoxin for pest control.

A heavy duty geared motor ensures regular dosing of the tablet or pellet fumigant as it enters the stored grain. Uniform dosing ensures a high level of protection and quality.

The pill dispenser is typically installed at the manhole of the silo or at the point where the main receiving elevator discharges grain into the head house conveying system.

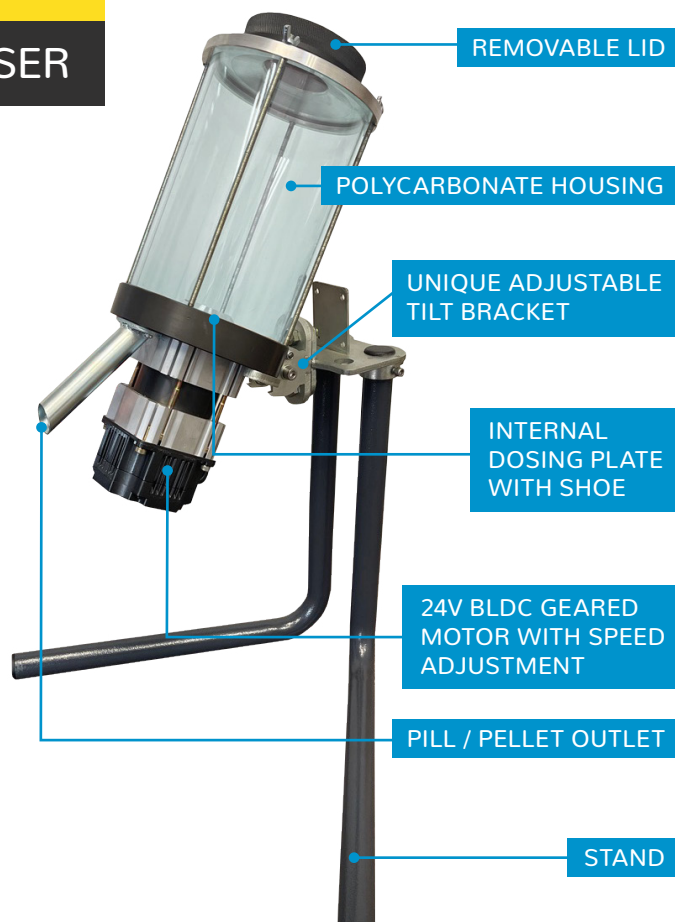

## SPECIFICATIONS

|                       |                                                               |
|-----------------------|---------------------------------------------------------------|
| DIMENSIONS            | 250mm long x 180mm wide x 520mm high                          |
| WEIGHT (EMPTY)        | 15kg                                                          |
| DRIVE MOTOR           | - 24V BLDC geared motor<br>- Speed adjustable from 1 - 10PRM  |
| DOSING PLATE          | - Pills per minute adjustable with simple dial<br>- Holes: 10 |
| END CAPS AND HOUSING  | Extruded and machined aluminium                               |
| BEARINGS              | Sealed FAG bearings                                           |
| PILL / PELLET HOUSING | Polycarbonate with gasket seals                               |
| BASE PLATE            | Deep anodised aluminium                                       |



info@turnstar.co.za | www.turnstar.co.za

Turnstar Systems (Pty) Ltd | Reg No: 2012/100536/07 | Established in 1990



TurnstarSystems



TurnstarSA

**JOHANNESBURG**  
HEAD OFFICE AND FACTORY

+27 (0)11 786 1633

**WESTERN CAPE**  
BRANCH

+27 (0)21 981 3043

+27 (0)82 417 7408

**KWAZULU NATAL**  
BRANCH

+27 (0)32 947 0391

+27(0)76 589 3410



ISO 9001:2015